


# NyteWatch™ Series Low-Glare Motion Sensor


## ORDERING INFORMATION

Catalog Number: Example: NBA2150BLK

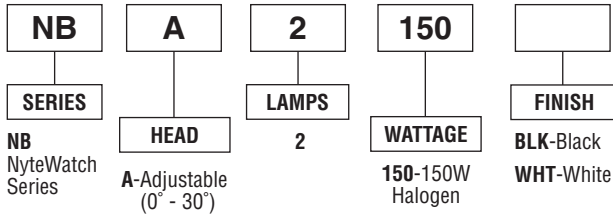


Patents-Pending


## TECHNICAL INFORMATION

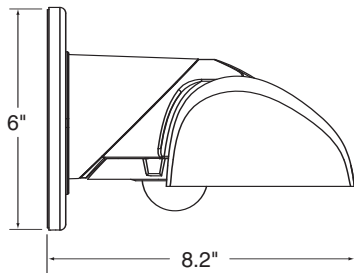

Wall-Mounted Configuration

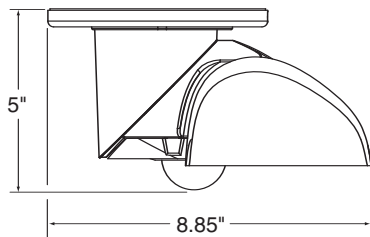

Soffit-Mounted Configuration

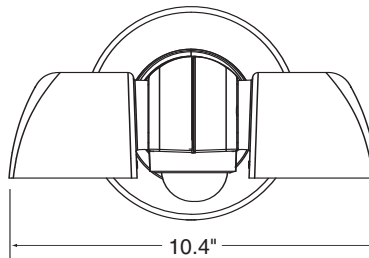

Front View

## PRODUCT SPECIFICATIONS

- Architectural design blends with any environment
- Low-glare optics
- Patent-Pending swivel design easily adapts to walls or soffits
- Die-cast aluminum construction
- Soda-lime tempered glass lenses
- Universal mounting plate with integral bubble level
- Adjusts from 0° - 30° for cutoff or forward-throw applications
- 240° horizontal vision plane and 70° vertical vision plane with anti sneak-by optics
- Nyte-Glow™ setting dims light to 30% for dusk-to-dawn operation
- Motion sensor has 10-second to 15-minute time delay control with automatic sensitivity adjustment
- UL-Approved for internal splicing eliminates the need for an external splice box
- Universal back plate for mounting to recessed or surface junction boxes, round boxes or single gang FS boxes
- Built-in photo control with ON/OFF switch
- Includes (2) 150w quartz halogen lamps
- Built-in surge protection
- 10-Year Limited Warranty



UL Wet Location Listed.




# 7-8

# NyteWatch Series Low-Glare Motion Sensor

---

## PHOTOMETRICS

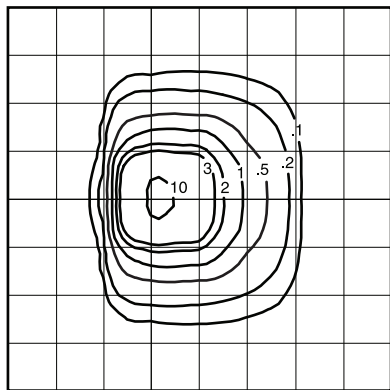

NyteWatch Model NBC (Fixed)  
Lamp: (2) 150w Quartz Halogen  
Lumens: 5,700 (2) lamps  
Mounting Height: 10 feet  
Tilt: 0°